


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NAVEPOINT, INC.. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/14/22	GUTTADAURO

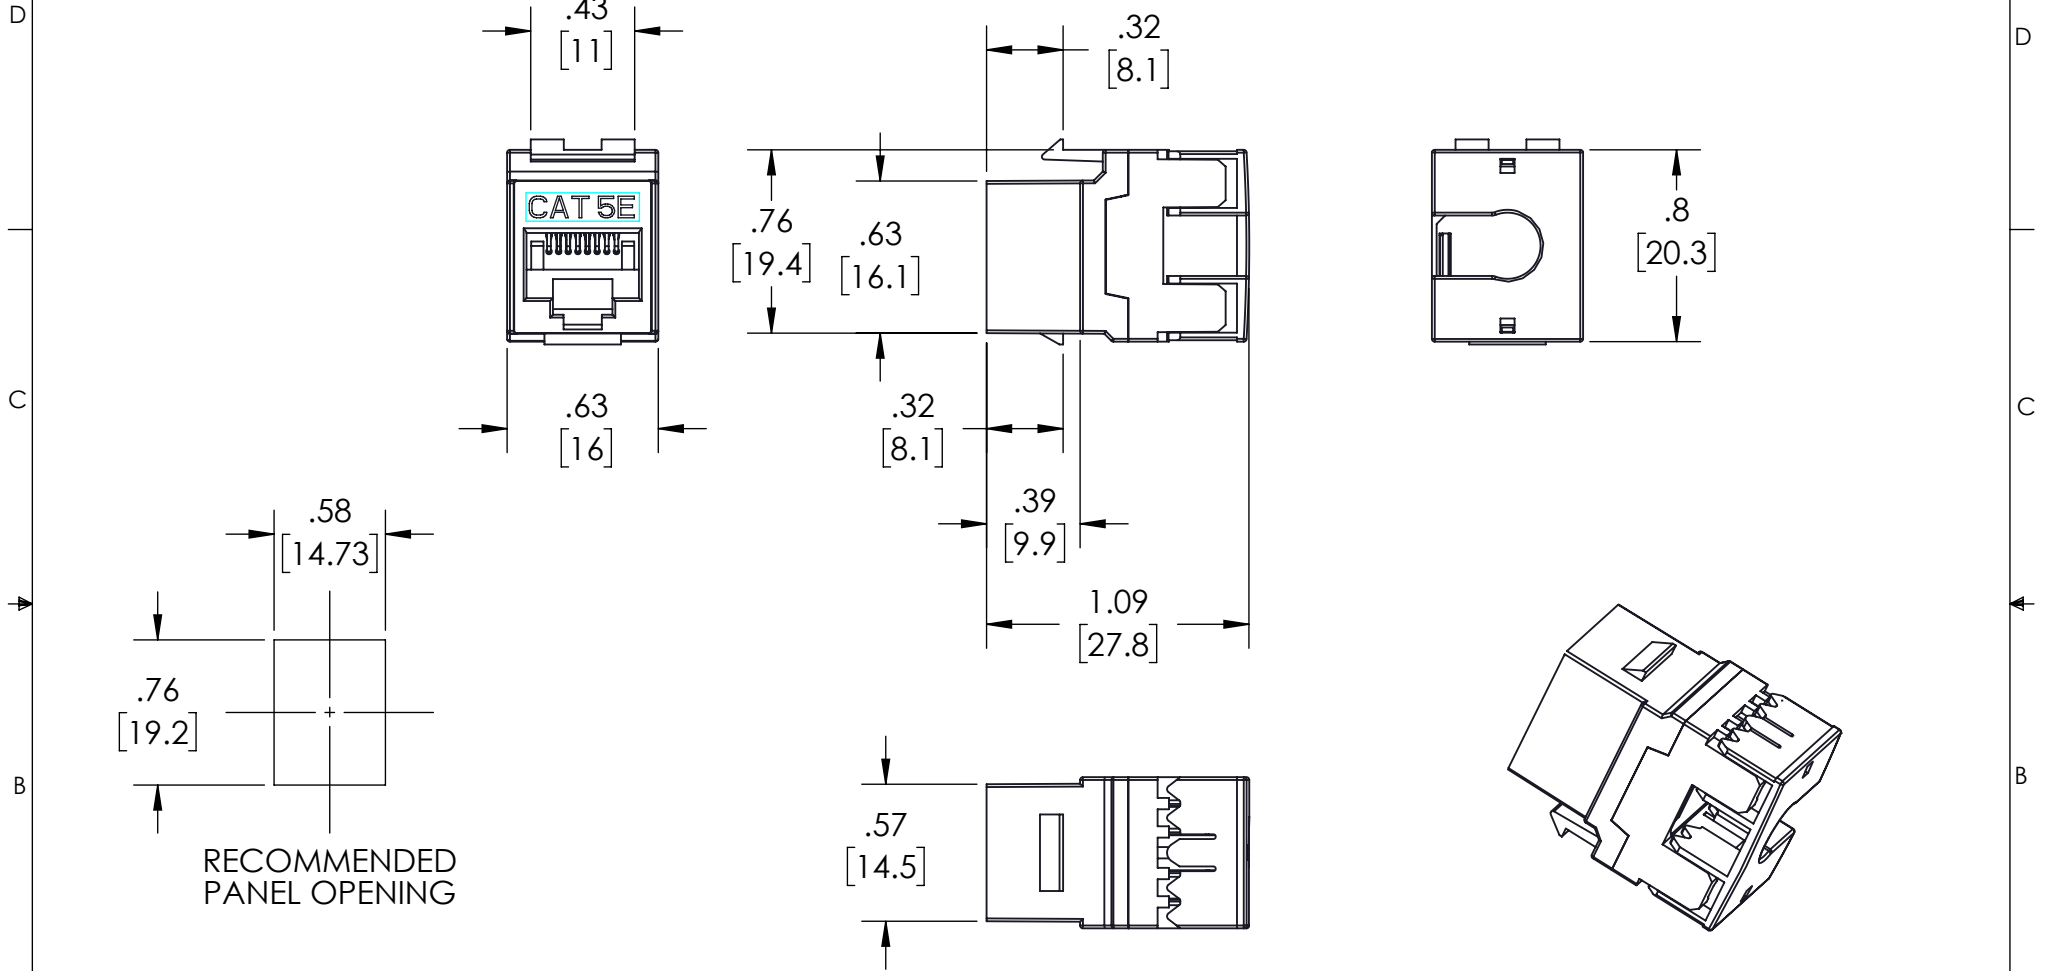

RECOMMENDED
PANEL OPENING

SPECIFICATION:

1. HOUSING MATERIAL: PC
2. CONTACT MATERIAL : GOLD PLATED PHOSPHOR BRONZE.
3. T568A & T568B WIRING.
4. STORAGE TEMPERATURE: -40°C TO 70°C.
5. OPERATION TEMPERATURE: -10°C TO 60°C.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]		APPROVALS		DATE		 an INFINITI® brand 859 E. Park Avenue, Libertyville, IL 60048 USA. Phone: 1.800.505.1363	
OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0		DRAWN BY VTHANGARAJ		05/14/22			
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [.5] ANGLES ± 1° .XXX = ± .005 [.13]		CHECKED BY VCHAN		05/14/22			
		APPROVED BY GUTTAUARO		05/14/22			
		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		PRODUCT DESCRIPTION 180 degree C5E keystone Jack			
THIRD-ANGLE PROJECTION 		COLOR VARIATIONS MAY OCCUR		SIZE A	CAGE CODE 7UTA6	ITEM NO. CAT5e-U-UTP-180	REV. A
				SCALE: NONE		CAD FILE: CAT5e-U-UTP-180.SLDDRW	
				SHEET 1 OF 1			